
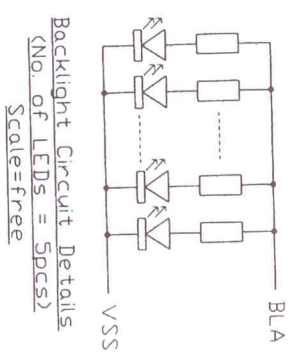


Terminal No.	Pin Name
1	VDD
2	VSS
3	/CS
4	RS
5	/WR
6	/RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/RST
16	BLA



- Note:
- *1. LCD Display Type : FSTN, Positive, Transflective
 - *2. Viewing Direction : 6H
 - *3. Duty : 1/160, Bias : 1/12
 - *4. Operating Voltage : 3.3V
 - *5. Backlight Color : White
 - *6. Backlight Supply : 85mA (3.3V TYP)
 - *7. Driver Controller: ST7529 (or equivalent)
 - *8. Operating Temperature : -20°C~70°C
 - *9. Storage Temperature : -30°C~80°C
 - *10. Environmental Safe Standard : RoHS

C			
B			
A	Typing Correction		Yiou Huifang 2008-05-01
Rev Note			
Dwg Title BTG-241601G-WT6WLW			
Dwg No. MK-002317a-1-1		Date 2008-02-29	
Scale	1:1	Unit	Paper Size
3/2	±0.5	mm	A3
Approved	Checked	Urgen	2hou Huifang

BeyondTek, Inc.